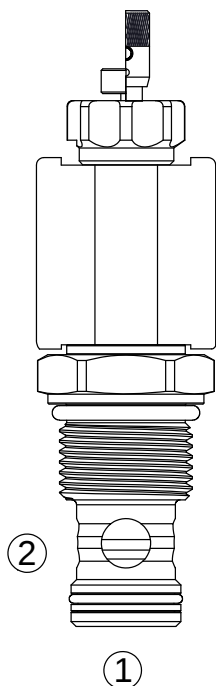


ZY-EP-12W-06 座阀，2 通，常开
ZY-EP-12W-06 Poppet, 2-Way, Normally Open

描述 DESCRIPTION:

电磁驱动、2通、导控座阀式、常开、液压螺纹插装阀，用于要求低泄漏的负载保持应用。
A solenoid-operated, 2-way, piloted, poppet-type, normally open, screw-in, hydraulic cartridge valve designed for low leakage in load-holding applications.

工作原理 OPERATION:

断电时, **ZY-EP-12W-06** ②到①互通;

通电后, ②到①关闭, 当①口压力超过电磁铁力, ①到②方向通。

应急手控选件操作方法: 请用工具按下并按住按钮, ②到①关闭; 松开按钮, 返回常态。


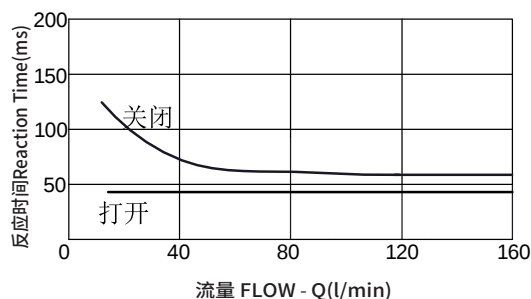
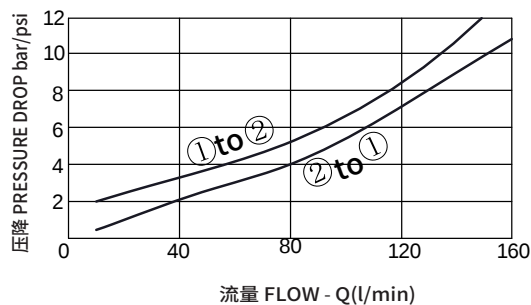
When de-energized, the **ZY-EP-12W-06** poppet lifts to open flow from ② to ① ;
Flow is also open from ① to ② .

When energized ,the cartridge acts as a check valve, allowing flow from ① to ② , while blocking flow from ② to ① , after overcoming the solenoid force.

Operation of Manual Override Option: To override, push button in to activate. To return to normal valve function, release button.

机能符号 SYMBOLS:

ISO:


性能图 PERFORMANCE: (Cartridge Only)

特性 RATINGS:

工作压力: 350 bar

额定流量: 150 l/min

内部泄漏: 在 350 bar 时, 最大为 0.15 毫升/分钟 (3 滴/分钟)

温度范围: -40°C 至 120°C, 标准丁腈橡胶密封

线圈额定负载: 可在 85% 至 115% 的额定电压范围内连续工作

介质: 粘度介于 7.4~420 cSt (50~2000 sus) 的矿物油或具有润滑作用的合成油

阀孔: ZY-VC12-2

Operating Pressure: 350 bar

Rated Flow : 150 l/min

Internal Leakage: 0.15 cc/minute (3 drops/minute) max. at 350bar

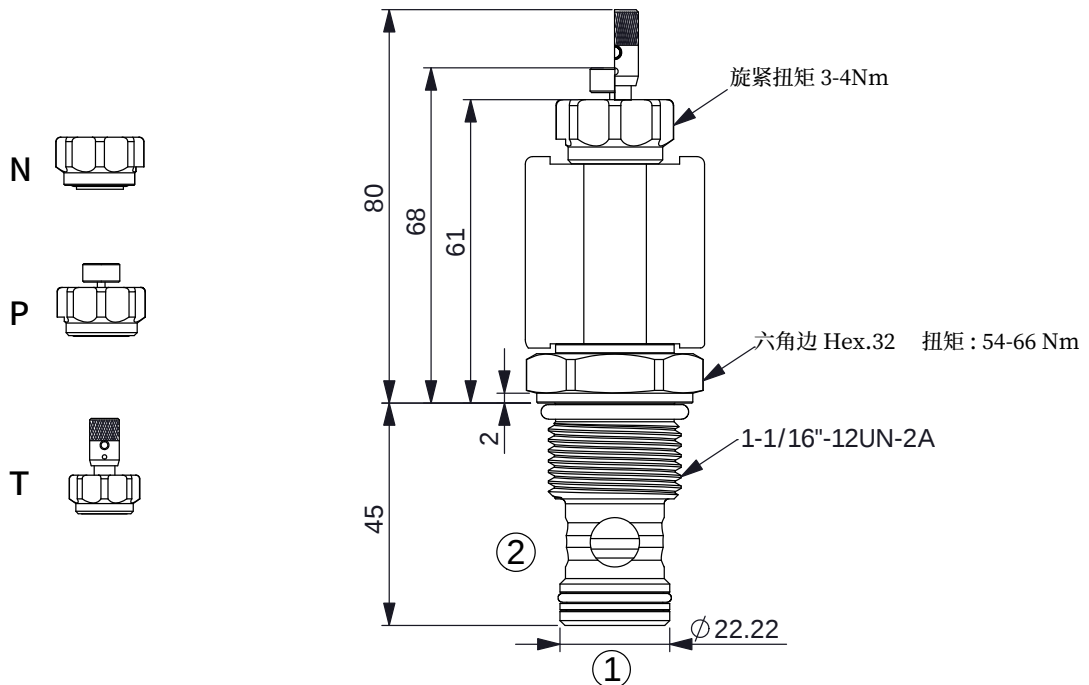
Temperature: -40 to 120 °C with standard Buna seals;

Minimum Pull-in Voltage: 85% of nominal at 207 bar (3000 psi);

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus);

Cavity: ZY-VC12-2

尺寸 DIMENSIONS:



特点 FEATURES:

- 额定电磁线圈适合连续工作。
- 阀座经硬质处理, 耐用且低泄漏。
- 可选线圈电压和终端。
- 高效湿式衔铁结构。
- 插件电压可互换。
- 应急手控选件。
- 可选IP69K防水E型线圈。
- 整体模铸型线圈设计。
- 工业通用阀孔。

- Continuous-duty rated solenoid.
- Hardened seat for long life and low leakage.
- Optional coil voltages and terminations.
- Efficient wet-armature construction.
- Cartridges are voltage interchangeable.
- Manual override option.
- Optional waterproof E-Coils rated up to IP69K.
- Unitized, molded coil design.
- Industry common cavity.

订购型号 TO ORDER:

ZY-EP-12W-06

(Option) 选件
(None) 无
(Push rod auxiliary device)
推杆辅助装置
(Push rod with torsion fixing
auxiliary device)
推杆附扭转固定辅助装置
(Porting) 阀块油口
(For ordering valve block
models, see: 6.0.0.00)
订购阀块型号请参见: 6.0.0.00

(Seals) 密封材料
Buna N(Sta)
丁腈橡胶(标准型)
(Fluorocarbon) 氟橡胶

标准线圈电压
(Voltage Std. Coil)

0 无线圈**
10 10 VDC
12 12 VDC
24 24 VDC
36 36 VDC
48 48 VDC
24 24 VAC
110 110 VAC
115 115 VAC
220 220 VAC
230 230 VAC

**包括标准线圈螺母
*仅限DS、DW或DL终端
**Includes Std. Coil Nut AG
† DS, DW or DL
terminations only.

E型线圈(E-Coil)

10 10 VDC
12 12 VDC
20 20 VDC
24 24 VDC

标准线圈终端(VDC)
Termination(VDC)Std.Coil

DS Dual Spades 双扁形接头
DG DIN 43650
DL Leadwires 导线(2)
DL/W Leads w/Weather-Pack®
Connectors 导线, 带连接器
DR Deutsch DT04-2P

标准线圈终端(VAC)
Termination(VAC)Std.Coil

AG DIN 43650
AP 1/2英寸导线管

E型线圈终端(VDC)
Termination(VDC)E-Coil

ER Deutsch DT04-2P
(IP69K Rated)符合标准
EY Metri-Pack® 150
(IP69K Rated)符合标准

Coils with internal diode are available.
Consult factory.
提供带内置二极管的线圈. 请咨询工厂