

ZY-CV-20-P 单向阀
ZY-CV-20-P Check Valve
描述 DESCRIPTION:

螺纹插装式液压单向阀, 用作单向截止或负载保持设备。

A screw-in, cartridge-style, hydraulic check valve for use as a blocking or load-holding device.

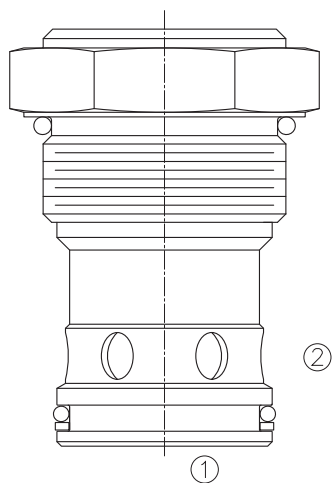
工作原理 OPERATION:

ZY-CV-20-P 当在①口的压力超过开启压力, ①到②开启;


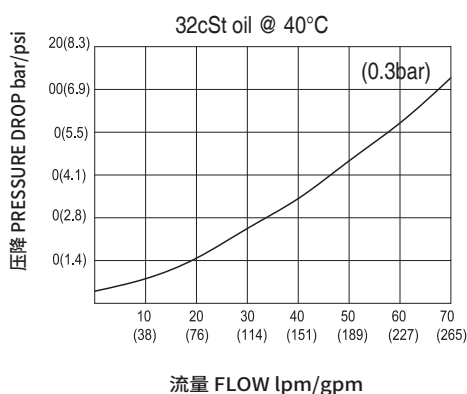
在反方向, ②到①关闭。

The **ZY-CV-20-P** Pressure at ① overcomes the spring-bias poppet and allows free flow from ① to ② .

Flow in the opposite direction, from ② to ① ,is blocked by the poppet.


机能符号 SYMBOLS:

ISO:


性能图 PERFORMANCE: (Cartridge Only)

特性 RATINGS:

工作压力: 350bar

流量: 参见性能图

内部泄漏: 在 350bar 最大 2 (滴/分)。

温度范围: -40°C ~ 120°C

介质: 粘度介于 7.4~420 cSt (50~2000 sus) 的矿物油或具有润滑作用的合成油

阀孔: ZY-VC20-2;

Operating Pressure: 350bar

Flow: See Performance Chart;

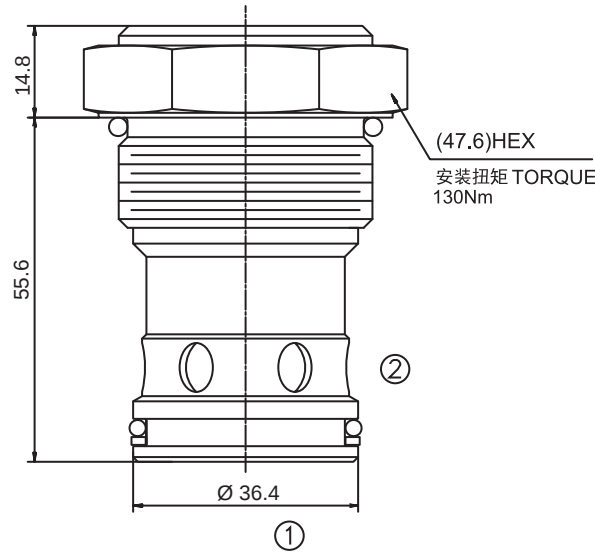
Internal Leakage: 2 drops/min. max. at 350bar

Temperature: -40 to 120 °C

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus);

Cavity: ZY-VC20-2;

尺寸 DIMENSIONS:



特点 FEATURES:

- 阀座经硬质处理, 耐用, 低泄漏。
- 可灵活选择不同背压的复位弹簧。
- 全导向阀芯组件。
- 体积小。
- 快速关闭到位。
- Hardened seat for long life and low leakage.
- Optional bias springs for back-pressure application flexibility.
- Fully guided check assembly.
- Compact size.
- Fast closing and seating.

订购型号 TO ORDER:

