

ZY-CV-2H 单向阀
ZY-CV-2H check valve
描述 DESCRIPTION:

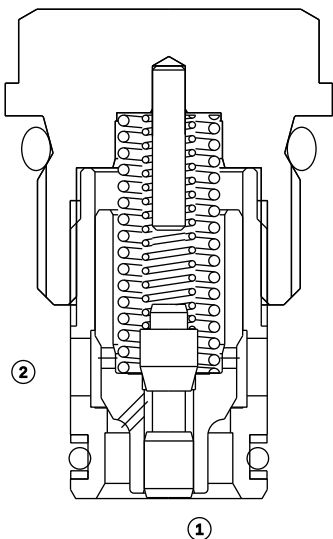
螺纹插装式液压单向阀, 用作单向截止或负载保持设备。

A screw-in, cartridge-style, hydraulic check valve for use as a blocking or load-holding device.


工作原理 OPERATION:

ZY-CV-2H 当在①口的压力超过开启压力, ①到②开启; 在反方向, ②到①关闭;

The **ZY-CV-2H** Pressure at ① overcomes the spring-bias poppet and allows free flow ① to ②. Flow in the opposite direction, from ② to ①, is blocked by the poppet.


机能符号 SYMBOLS:

ISO:


特性 RATINGS:

最大操作压力: 350 bar (5000 psi)

流量: 150 L/min

内泄漏: 3滴/分钟最大值

温度范围: -40°C ~ 120°C

介质: 粘度介于 7.4~420 cSt (50~2000 sus) 的矿物油或具有润滑作用的合成油

阀孔: ZY-CV-2H;

Maximum Operating Pressure: 350 bar (5000 psi)

FLOW: 150 L/min.

Internal Leakage): 3 drop/min.max.

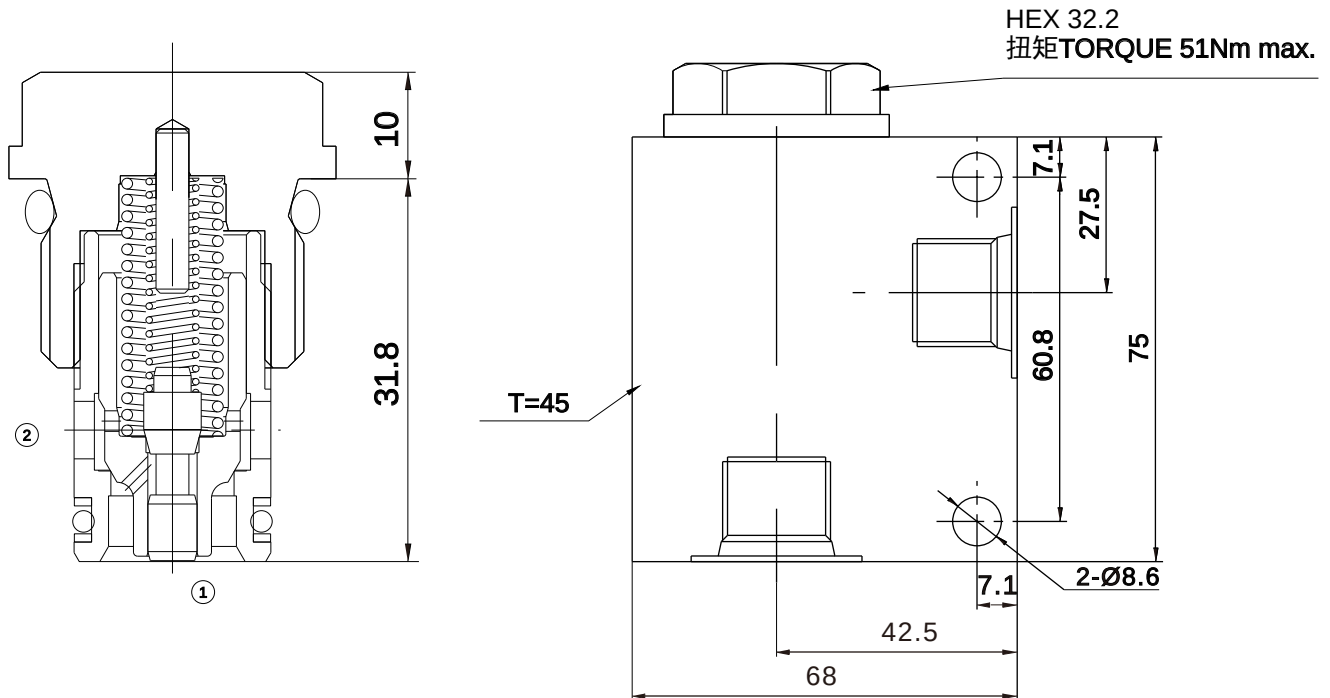
Temperature: -40 to 120 °C

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus);

Cavity: ZY-CV-2H;

ZY-CV-2H

尺寸 DIMENSIONS:



特点 FEATURES:

- 硬化处理,零件耐久性强
- 工业通用插孔
- 紧凑的结构
- 低泄漏设计
- Hardened, precision ground parts for durability
- Industry common cavity
- Compact size
- Low leakage design

订购型号 TO ORDER:

ZY-CV-2H		
(Porting) 阀块油口 (For ordering valve block models, see:6.0.0.00) 订购阀块型号请参见:6.0.0.00		
	(Seals)密封材料	
	N	Buna N(Sta) 丁腈橡胶(标准型)
	V	(Fluorocarbon)氟橡胶