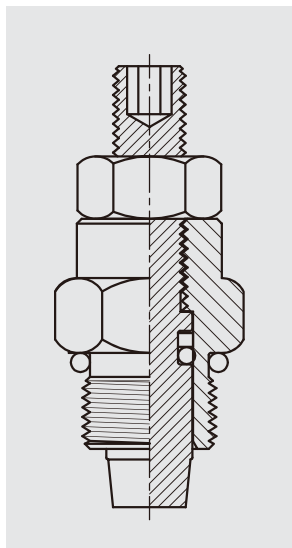


ZY-CST-01 节流阀

ZY-CST-01 Needle Valve

**描述 DESCRIPTION:**

螺纹插装式, 可变节流孔, 节流阀。

A screw-in, cartridge-style, variable orifice, hydraulic flow restrictor valve.

工作原理 OPERATION:

ZY-CST-01 型, 该阀体积小, 可调节流量大小至完全关闭, 常用于缓冲或停止压力表及当成中止阀来使用。

The **ZY-CST-01** Controls flow at an adjusted value over a varying pressure range. The volume of this valve is small. This valve can adjust the flow rate till complete close and is usually used to buffer or stop pressure gauge; It can be taken as a stop valve.

机能符号 SYMBOLS:

ISO:

**特性 RATINGS:**

工作压力: 250 bar (3600 psi)

额定流量: 10L/min

内部泄漏: 最大0.25 毫升/分钟 (5 滴/分钟) (关闭时)

温度范围: -40°C ~ 120°C

介质: 粘度介于7.4~420 cSt (50~2000 sus)的矿物油或具有润滑作用的合成油

Operating Pressure: 250 bar (3500 psi);

Rated Flow: 10L/min


Internal Leakage: 0.25 cc/minute (5 drop/minute) max. at shut-off

Temperature: -40 to 120 °C

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus);

ZY-CST-01
尺寸 DIMENSIONS:
插孔 Cavity:

ZY-T201

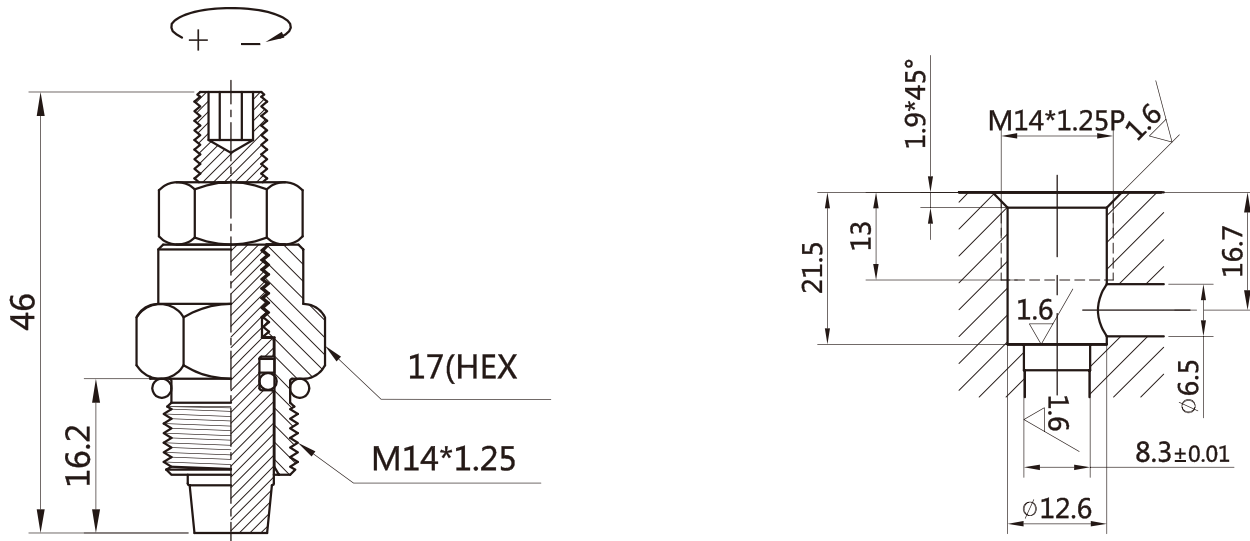
特点 FEATURES:

- 线性调节。
- 尺寸紧凑。
- Linear adjustment.
- Compact size.

订购型号 TO ORDER:

ZY-CST-01 - **S** - - - -

(Adjusting Flow Character) **限流原理**
(Taper Type) Stangard
锥型杆限流 (标准型) **S**

(Adjustment Option) **调节选件**
(1/4 in. Hex Allen Head)
1/4 寸内六角头 **A**

(Seals) **密封材料**
Buna N (Sta)
N 丁腈橡胶 (标准型)
V (Fluorocarbon) 氟橡胶