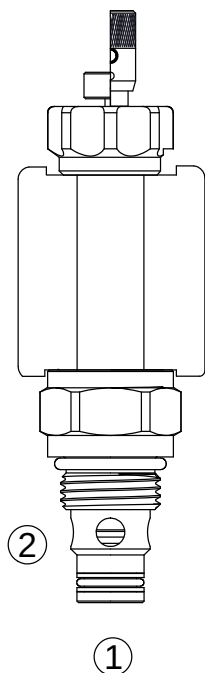


ZY-EP-08W-32 座阀，2 通，常开，双向截止
ZY-EP-08W-32 Poppet, 2-Way, N.O., Bi-Directional Blocking

描述 DESCRIPTION:

电磁驱动、2 通、常开、内部导控、座阀式、双向截止、液压螺纹插装阀，用于要求低泄漏的负载保持应用。

A solenoid-operated, 2-way, normally open, internally piloted, poppet-type, bi-directional blocking, screw-in hydraulic cartridge valve, designed for low leakage in load-holding applications.

工作原理 OPERATION:

A

断电时，ZY-EP-08W-32 允许油液双向流动。


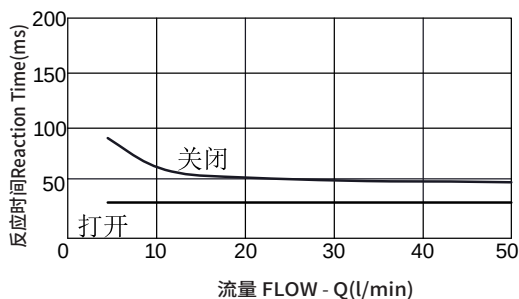
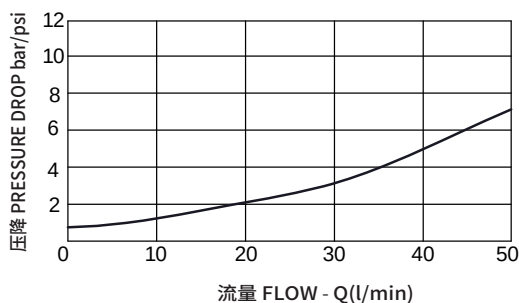
通电后，阀芯关闭，截止油液从 ② 流向 ① 或从 ① 流向 ②。

When de-energized, the ZY-EP-08W-32 allows flow in both directions.

When energized, the valve's poppet closes on its seat, blocking flow from 2 to 1 or 1 to 2.

机能符号 SYMBOLS:

ISO:


性能图 PERFORMANCE: (Cartridge Only)

特性 RATINGS:

工作压力: 350 bar

额定流量: 40 l/min

内部泄漏: 在 350 bar 时, 最大为 0.15 毫升/分钟 (3 滴/分钟)

温度范围: -40°C 至 120°C, 标准丁腈橡胶密封

线圈额定负载: 可在 85% 至 115% 的额定电压范围内连续工作

介质: 粘度介于 7.4~420 cSt (50~2000 sus) 的矿物油或具有润滑作用的合成油

阀孔: ZY-VC08-2

Operating Pressure: 350 bar

Rated Flow: 40 l/min

Internal Leakage: 0.15 cc/minute (3 drops/minute) max. at 350 bar

Temperature: -40 to 120 °C with standard Buna seals;

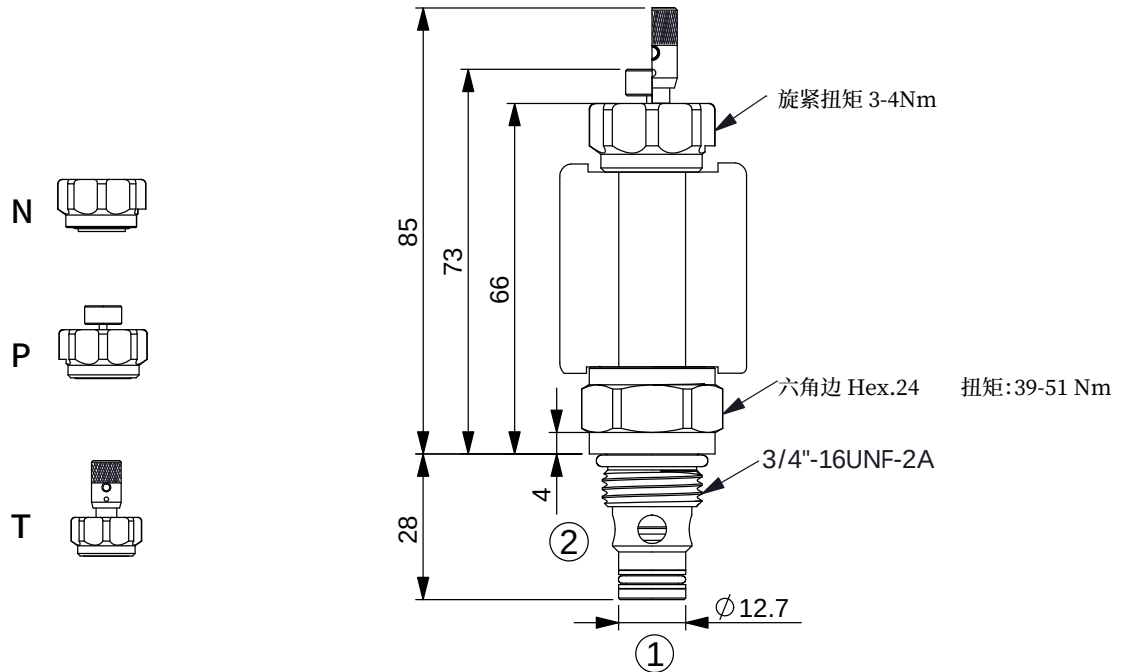
Minimum Pull-in Voltage: 85% of nominal at 207 bar (3000 psi);

Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 7.4 to 420 cSt (50 to 2000 sus);

Cavity: ZY-VC08-2

ZY-EP-08W-32

尺寸 DIMENSIONS:



特点 FEATURES:

- 额定线圈适合连续工作。
- 可选线圈电压和终端。
- 高效湿式衔铁结构。
- 应急手控选件。
- 插件电压可互换。
- 可选 IP69K 防水 E 型线圈。
- 阀座经硬质处理, 耐用且低泄漏。
- 整体模铸型线圈设计。
- 高效低成本阀孔。

- Continuous-duty rated coil.
- Optional coil voltages and terminations.
- Efficient wet-armature construction.
- Manual Override option.
- Cartridges are voltage interchangeable.
- Optional waterproof E-Coils rated up to IP69K.
- Hardened seat for long life and low leakage.
- Unitized, molded coil design.
- Cost-effective cavity.

订购型号 TO ORDER:

ZY-EP-08W-32

(Option) 选件
(None) 无
(Push rod auxiliary device)
推杆辅助装置

(Push rod with torsion fixing
auxiliary device)
推杆附扭转固定辅助装置

(Porting) 阀块油口

(For ordering valve block
models, see: 6.0.0.00)

订购阀块型号请参见: 6.0.0.00

(Seals) 密封材料

Buna N (Sta)
丁腈橡胶 (标准型) N
(Fluorocarbon) 氟橡胶 V

标准线圈电压
(Voltage Std. Coil)

0 无线圈**
10 10 VDC
12 12 VDC
24 24 VDC
36 36 VDC
48 48 VDC
24 24 VAC
110 110 VAC
115 115 VAC
220 220 VAC
230 230 VAC

**包括标准线圈螺母
*仅限 DS、DW 或 DL 终端
**Includes Std. Coil Nut AG
† DS、DW 或 DL
terminations only.

E 型线圈 (E-Coil)

10 10 VDC
12 12 VDC
20 20 VDC
24 24 VDC

标准线圈终端 (VDC)
Termination (VDC) Std. Coil

DS Dual Spades 双扁形接头
DG DIN 43650
DL Leadwires 导线 (2)
DL/W Leads w/Weather-Pack®
Connectors 导线, 带连接器
DR Deutsch DT04-2P

标准线圈终端 (VAC)
Termination (VAC) Std. Coil

AG DIN 43650
AP 1/2 英寸导线管

E 型线圈终端 (VDC)
Termination (VDC) E-Coil

ER Deutsch DT04-2P
(IP69K Rated) 符合标准
EY Metri-Pack® 150
(IP69K Rated) 符合标准

Coils with internal diode are available.
Consult factory.
提供带内置二极管的线圈. 请咨询工厂